



# PRESSURE TRANSMITTERS



**PART NUMBER:**


**P T X - ?? G - M A - G 1 / 4 - D I N - C**

\*REPLACE ?? WITH PRESSURE RANGE (BAR)\*

**FEATURES:**

Stainless steel wetted parts • 4 - 20 mA output • DIN 43650 connector • G 1/4 male fitting  
High accuracy • Over and reverse voltage protected • Rugged design

MECHANICAL DRAWING

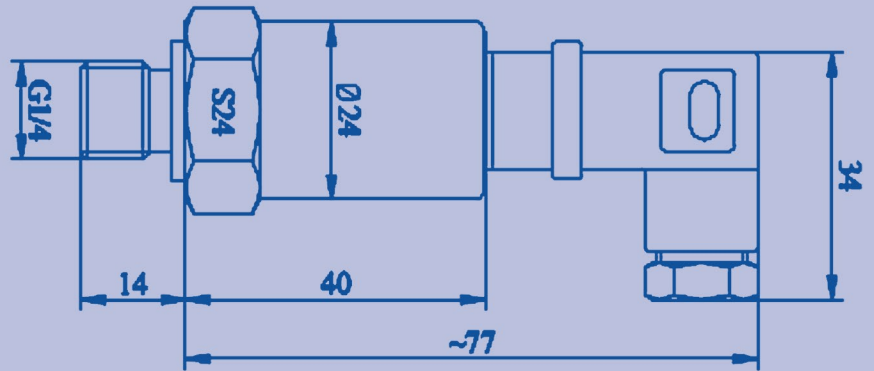

**RANGES:**

- 0 - 2 bar
- 0 - 6 bar
- 0 - 10 bar
- 0 - 25 bar
- 0 - 250 bar
- 0 - 400 bar

OTHER RANGES AND CONNECTIONS ARE AVAILABLE ON REQUEST

**SPECIFICATIONS:**

**SPECIFICATION**

- Proof Pressure
- Accuracy at 25°C
- Long-Term Stability
- Response Time
- Operating Temperature
- Compensated Temperature
- Storage Temperature
- Output Signal
- Supply Voltage
- IP Rating
- Random Vibration
- Shock
- Drop (Any Axis)
- Pressure Connector
- Connector Material
- Electrical Connection
- Seal Material

**INFORMATION**

- >150% F.S
- ±0.5% FS/year standard
- ±0.25% FS/year
- ≤10 ms
- 40°C ~ 85°C
- 0°C ~ 50°C
- 40°C ~ 105°C
- 4 ~ 20 mA
- 8 ~ 28 VDC
- IP65
- 10g, 5 ~ 2000 Hz
- X/Y/Z, 20g, sine 11ms
- 1m
- G1/4
- 304 stainless steel
- DIN 43650 C
- NBR O-Ring (- 20°C ~ +100°C)